

SF 2420 is a high quality aramid fiber reinforced sheet with SBR binder, excellent for sealing steam, water, gases, oils, mild solvents and/or alkalis. The data given below is based on 1/32" sheet, except as otherwise noted.

SERVICE

Max T (at min. thickness)	752°F (400°C)
Max P (at min. thickness)	1450 psi
pH Range	3 - 11

PHYSICAL PROPERTIES

Color	Off-White
Density	112 lb/ft ³ (1.80 g/cc)
Sheet Thickness	1/64" - 1/8" (0.50 mm - 3.20 mm)
Sheet Size (also available in full rolls)	60" x 60", 60" x 120" (1.50 m x 1.50 m, 1.50 m x 3.00 m)

MECHANICAL PROPERTIES (ASTM F152)

Cross Grain Tensile	1910 psi (13.2 MPa)
With Grain Tensile	4350 psi (30.0 MPa)

IMMERSION PROPERTIES (ASTM F146)

Thickness Increase	Oil #3 @ 300°F	1.9%
	Fuel B @ 70 - 85°F	1.3%
Weight Increase	Oil #3 @ 300°F	6.4%
	Fuel B @ 70 - 85°F	3.3%

SEALING PROPERTIES

ASTM F36J	Compressibility	7.5%
	Recovery	52%
ASTM F37A	Fuel A @ 50 psi & 1000 psi Gasket Stress	0.50 mL/hr
ASTM F38	Creep Relaxation	13.7%
BS 7531	Nitrogen Gas Permeability	0.02 mL/min

COMPRESSED FIBER SHEET

SF 2420

PRODUCT PROFILE


DESIGN INFORMATION

Gasket Constants	m	3.2
	y	2900 psi (20.0 MPa)
PVRC Constants (1/16" thick)	Gb	N/A
	a	N/A
	Gs	N/A
TPmax	N/A	
Recommended Surface Finish	125 - 250 µin (3.2 - 6.3 µm)	
Dielectric Strength	4.2 kV/mm	
ASTM Callout	711110M5 †	† some digits may be chosen differently

PRESSURE CONTAINMENT AND TEMPERATURE

SF 2420 Thickness (in.)	0.020	1/32	1/16	0.080	1/8
Max. Temperature (°F)	752	725	644	599	356
Max. Pressure (psi)	1450	1330	1015	725	290

NOTE: Above pressure/temperature cannot be used simultaneously.

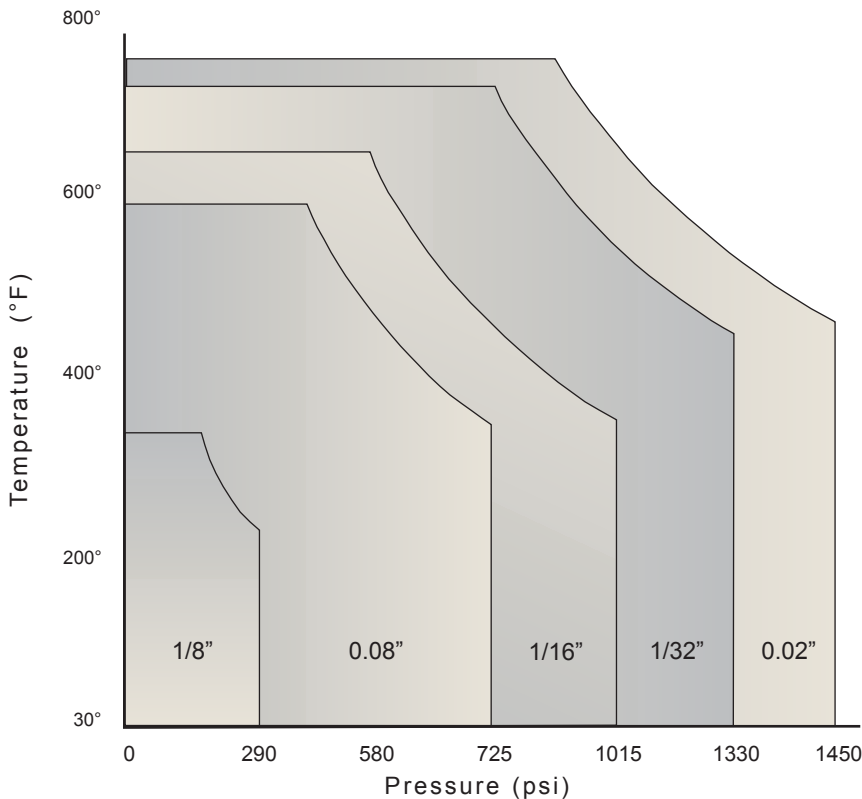

This Data Sheet relates to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same. The acquisition of additional information may necessitate revisions to parts or all of this Data Sheet, and such information will be supplied as it becomes available.

As the Company's products are used for a multiplicity of purposes, and as the Company has no control over the method of their application or use, the Company excludes all conditions or warranties, express or implied, by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the Company and the Customer is given for the Customer's assistance only and without liability on the part of the Company.



FLEXSEAL INDUSTRIAL

A FULL LINE GASKET & O-RING SUPPLIER

A Flexitallic® Distributor

CALL 832-445-0000

FAX 832-445-0002

EMAIL sales@flexsealindustrial.com

VISIT www.flexsealindustrial.com

24/7 EMERGENCY CALLOUT SERVICE

Flexseal Industrial is a full line gasket and o-ring distributor. We provide a broad range of products including but not limited to Flexitallic spiral wound gaskets, die cut gaskets, sheet material, Flexpro (kammprofile) gaskets, RTJ's and o-ring seals.

We offer superior customer service and are committed to meeting the needs of all your industrial sealing applications.

SPIRAL WOUND GASKETS




SIGMA



Thermiculite
innovative. versatile. complete.



Flexpro™

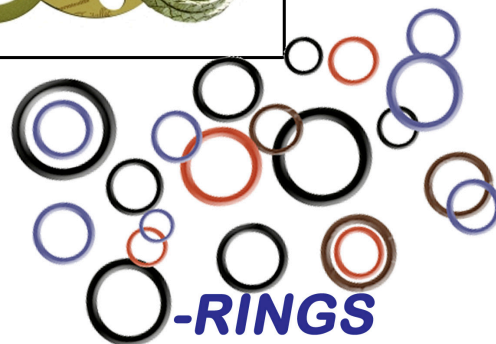

-RINGS