

SF 3500 is a superior performance compressed non-asbestos gasket material ideal for use in pumps (including split case). It is constructed with glass and aramid fiber reinforcement, and it uses a NBR binder. The data given below is based on a 1/64" sheet, except as otherwise noted.

SERVICE

Max T (at min. thickness)	824°F (440°C)
Max P (at min. thickness)	3000 psi (20.7 MPa)
pH Range	3 - 11

PHYSICAL PROPERTIES

Color	Red
Density	100 lb/ft ³ (1.60 g/cm ³)
Sheet Thickness	1/64" - 0.020" (0.40 mm - 0.50 mm)
Sheet Size (also available in full rolls)	60" x 60", 60" x 120" (1.50 m x 1.50 m, 1.50 m x 3.00 m)

MECHANICAL PROPERTIES (ASTM F152)

Cross Grain Tensile	3335 psi (23.0 MPa)
With Grain Tensile	6670 psi (46.0 MPa)

IMMERSION PROPERTIES (ASTM F146)

Thickness Increase	Oil #3 @ 300°F	4%
	Fuel B @ 70 - 85°F	7%
Weight Increase	Oil #3 @ 300°F	N/A
	Fuel B @ 70 - 85°F	N/A

SEALING PROPERTIES

ASTM F36J	Compressibility	10%
	Recovery	62%
ASTM F37A	Fuel A @ 50 psi & 1000 psi Gasket Stress	N/A
ASTM F38	Creep Relaxation	N/A
BS 7531	Nitrogen Gas Permeability	0.01 mL/min



FLEXSEAL INDUSTRIAL

A FULL LINE GASKET & O-RING SUPPLIER

A Flexitallic® Distributor

CALL 832-445-0000

FAX 832-445-0002

EMAIL sales@flexsealindustrial.com

VISIT www.flexsealindustrial.com

24/7 EMERGENCY CALLOUT SERVICE

Flexseal Industrial is a full line gasket and o-ring distributor. We provide a broad range of products including but not limited to Flexitallic spiral wound gaskets, die cut gaskets, sheet material, Flexpro (kammprofile) gaskets, RTJ's and o-ring seals.

We offer superior customer service and are committed to meeting the needs of all your industrial sealing applications.

SPIRAL WOUND GASKETS




SIGMA



Thermiculite
innovative. versatile. complete.



Flexpro™

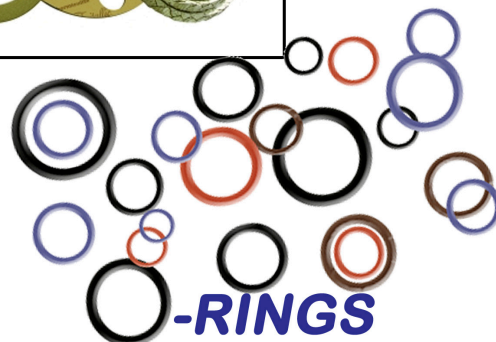

-RINGS


DESIGN INFORMATION

FSA Gasket Constants	m	3.7
	y	3335 psi (23.00 MPa)
Recommended Surface Finish	125 - 250 μ in (3.2 - 6.3 μ m)	
ASTM Callout	712120E32M7 †	† some digits may be chosen differently

P R E S S U R E C O N T A I N M E N T A N D T E M P E R A T U R E

SF 3500 Thickness (in.)	0.020
Max. Temperature (°F)	752
Max. Pressure (psi)	3000

NOTE: Above pressure/temperature cannot be used simultaneously.

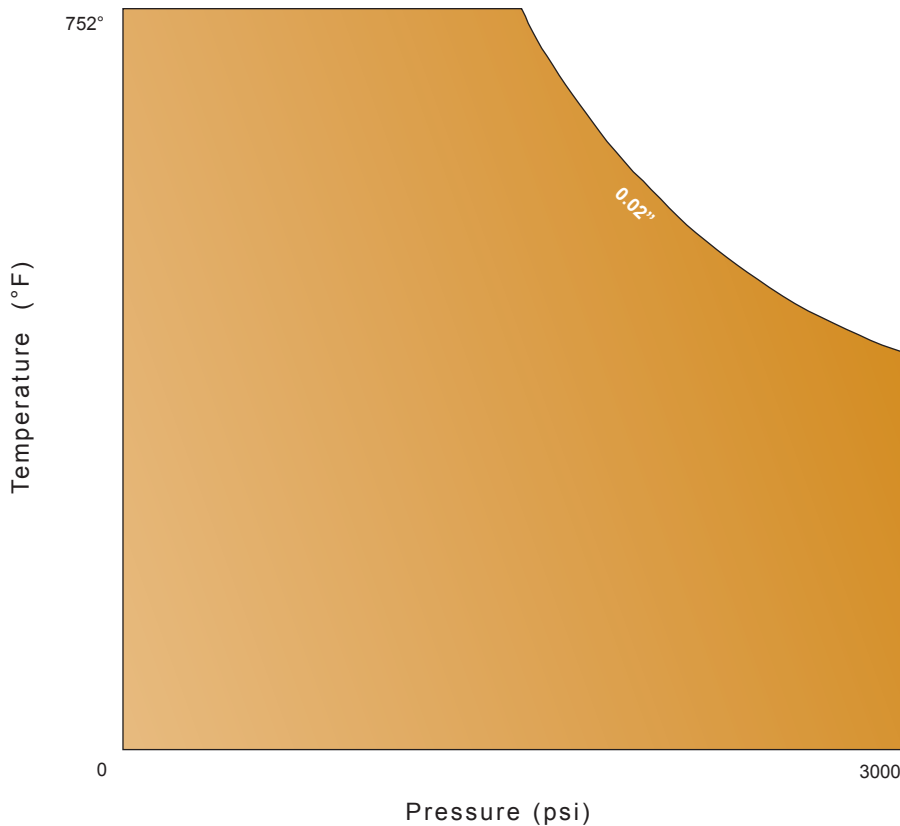

This Data Sheet relates to the material as supplied. The information contained herein is given in good faith, but no liability will be accepted by the Company in relation to same. The acquisition of additional information may necessitate revisions to parts or all of this Data Sheet, and such information will be supplied as it becomes available.

As the Company's products are used for a multiplicity of purposes, and as the Company has no control over the method of their application or use, the Company excludes all conditions or warranties, express or implied, by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the Company and the Customer is given for the Customer's assistance only and without liability on the part of the Company.